

SEPAR FILTER

SWK- 2000/10D

MARINE SERIES

Max. Flow Rate: 158 GPH - 600 LPH



SWK - 2000/10D



SWK - 2000/10UD

Separ 2000 series water separators fuel filters are a simple solution to many different fuel related problems. Five separate stages of filtration ensure 99.9% water separation at max flow. Low restriction reduces wear on fuel pumps and ensures full RPM's. Back flushable (cleanable) element reduces down time and costly element changes.

Inlet / Outlet Connections

Single Unit: 7/8-14 Straight o-ring SAE

Duplex Unit: #8 Male JIC Flare (Optional Adapters Available)

OPTIONS

M = Metal bowl

U = Switchable filter

MK = Metal bowl with contacts


G = Gauge

K = Clear bowl with contacts for water level indication

KD = Clear Bowl, heat shield, contacts for water level

D = Clear bowl with heat shield (U.S.C.G. and R.I.N.A.. Approved)

Flow Diagram

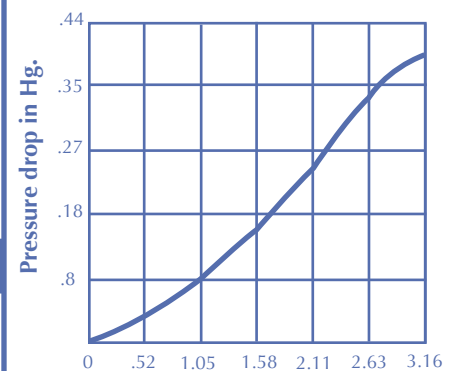

Flow Rate GPM

MAX Flow Rate 2.63 GPM

SEPAR of the America's LLC
201 SW 20th Street,
Fort Lauderdale, FL 33315

Phone: (954) 523 - 9396

Fax: (954) 522 - 0456

www.separfilter.com

info@separfilter.com

0701 11

