

SEPAR FILTER

SWK- 2000/130M

MARINE SERIES

Max. Flow Rate: 2052 GPH - 7800 LPH



SWK - 2000/130MK



SWK - 2000/130UMK

Separ 2000 series water separators fuel filters are a simple solution to many different fuel related problems. Five separate stages of filtration ensure 99.9% water separation at max flow. Low restriction reduces wear on fuel pumps and ensures full RPM's. Back flushable (cleanable) element reduces down time and costly element changes.

Inlet / Outlet Connections

Single Unit: 2" NPT Pipe

Duplex Unit: 2" NPT Pipe


OPTIONS

U = Switchable filter

MK = Metal bowl with contacts for water level

G = Gauge

Flow Diagram

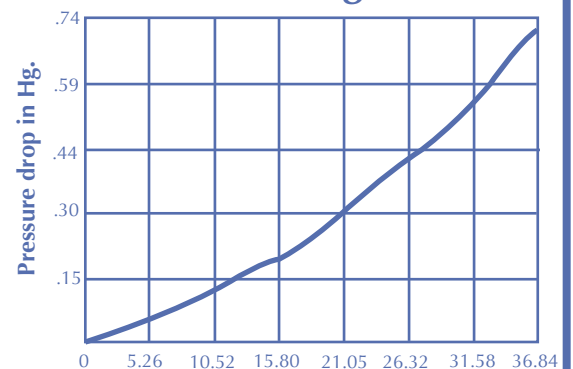

Flow Rate GPM

MAX Flow Rate 34.21 GPM

SEPAR of the America's LLC
201 SW 20th Street,
Fort Lauderdale, FL 33315

Phone: (954) 523 - 9396
Fax: (954) 522 - 0456

www.separfilter.com
info@separfilter.com

0701 17

